


Dual airflow

Floor standing split systems deliver air from both sides – cool air flows upward while warm air is directed downward – ensuring fast, even temperature distribution without uncomfortable drafts.

This technology enhances airflow volume, maintaining consistent and efficient cooling and heating.

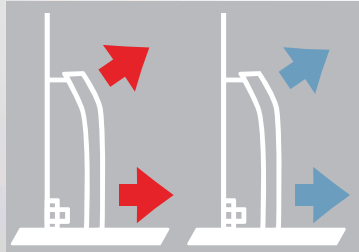

maxon CONSOLE

MODEL		INDOOR	MXI-12HFL013i	MXI-18HFL013i
		OUTDOOR	MXO-1U12HCO013i	MXO-1U18HCO013i
COOLING	Capacity	kW	3,5 (0,8 - 4,2)	5,0 (2,6 - 5,6)
	Power input	W	1000	1500
	Annual Energy Consumption	kWh/a	168	261
	SEER		7,3 (A++)	6,7 (A++)
HEATING	Capacity	kW	3,8 (0,5 - 4,7)	5,3 (2,2 - 6,3)
	Power input	W	980	1420
	Annual Energy Consumption	kWh/a	910	1414
	SCOP		4,0 (A+)	4,0 (A+)
Max. power input		W	1850	2950
Max. Operating Current		A	9	13,5
INDOOR UNIT	Air flow (Hi/Mi/Lo)	m³/h	650/580/490	780/690/600
	Sound power level	dB(A)	37/34/27/23	41/38/32/26
	Net dimensions (WxLxH)	mm	794x200x621	794x200x621
	Dimensions with packaging (WxLxH)	mm	865x280x719	865x280x719
	Net/Shipping Weight	Kg	14,9/18,8	14,9/18,8
OUTDOOR UNIT	Sound power level	dB(A)	54	55
	Net dimensions (WxLxH)	mm	765x303x555	805x330x554
	Dimensions with packaging (WxLxH)	mm	887x337x610	915x370x615
	Net/Shipping Weight	kg	26,6/29	32,5/35,2
	Refrigerant type	/	R32	R32
	Refrigerant charge	kg	0,71	1,15
PIPELINE	Liquid Side Diameter	mm	6,35	6,35
	Gas Side Diameter	mm	9,52	12,7
	Max. pipe length (Pre-charge)	m	5	5
	Additional charge per metre	g/m	12	12
	Max. refrigerant pipe length	m	25	30
	Max. difference in level	m	10	20
Operating range - cooling		°C	-15 ~ +50	-15 ~ +50
Operating range - heating		°C	-20 ~ +24	-20 ~ +24
Mounting holes spacing - outdoor		mm	452	511
Interconnect cable		mm²	4x1,5	4x1,5
Power Supply IU / OU		V,Hz,Ph	220-240V, 1Ph 50Hz	220-240V, 1Ph 50Hz



DUAL AIRFLOW



ULTRA SLIM DESIGN



INTELLIGENT AIR FLOW



LED DISPLAY



WALL INSTALLATION



FLOOR INSTALLATION



CONDENSER HEATER



COMPRESSOR HEATER



WI-FI



NIGHT MODE



SILENT OPERATION



ECO MODE



REFRIGERANT LACK DETECTION



HEPA FILTER



SELF-CLEAN



MULTI POWER LEVEL



MULTI UNIT INSTALLATION



FOLLOW ME



AUTO RESTART



24H TIMER



ERROR DETECTION



8°C HEATING



LOW AMBIENT COOLING



ECO REFRIGERANT

*Optional: wired remote controller MX-WRC120X2 (requires installation of the MX-module)